Specifications

Battery	4.5-6V (4pcs AAA dry battery)
Static current	45-60 μ A
Working current	200mA
Unlocking Way	Keys（2pcs）
	Card(≤300pcs)
	Passcode(≤300pcs, 6-10digital)
	Fingerprint（≤100pcs）
	App(Tuya wifi)
Administrator	9pcs（No.1-9） each ID is paired only one fingerprint, password, or card.
User	291pcs(No. 10-300) each ID is paired only one fingerprint, password, or card.
Low voltage alarm	≤4.7V
System locked	The system will lock after 5 times wrong within 5 minutes, it will last for 90 seconds.
System exit	No operation for more than 10 seconds
Working temperature	-10℃~60℃
Working humidity	20%~93%
Language	under the initialization: English: 555666880, Portuguese:555666881 Arabic: 555666882, Russian:555666883 Spanish: 555666884, Indonesian: 555666885 French:555666886, Korean: 555666887 Hebrew:555666888, Chinese:555666889

1

Operation

1. Kepad function

Keypad	Function
※	delete/back
#	confirm/enter manu
#	Close passage mode (under passage mode, press#)
5#	Open passage mode (under passage mode off, administrator open the lock, press 5#)
reset	Press the botton in back panel for 6-8s
Passcode protection	Press the passcode by XXX+passcode+XXX

2. Initial state:the lock can be opened by any fingerprint, card, or pin

※# enter system ⇨ Setup an administrator first

3. Admistrator setting:

※# administrator Passcode ⇨ 1 Administrator setting


1 Add administrator ⇨ Enter administrator information

2 Delete administrator ⇨ Enter number press # to confirm

3 Network setting ⇨ 2 Smart connection: Tuya wifi

① Search Tuya Smart in app store
② Registered an account and password
③ Add your family menbers informations.
④ Add the lock as below:

2

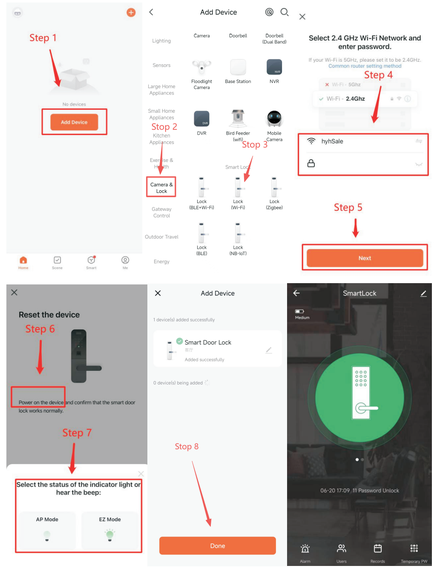

3

4. User setting:

※# administrator Passcode ⇨ 2 user setting

1 Add user ⇨ Enter user information

2 Delete user ⇨ Enter number press # to confirm

5. System setting:


※# administrator Passcode ⇨ 3 system setting

① Language Setting: press “1” open, press “2” closs.
② Unlock mode: “1” single unlock, “2” combine unlock.
③ Time setting: enter the right time information,press “#” confirm。
④Passage mode setting:press “1” open, press “2” closs.

6. Restore factory setting:

※# administrator Passcode ⇨ 4 restore factory setting

Press “#” confirm, press “※” cancle.

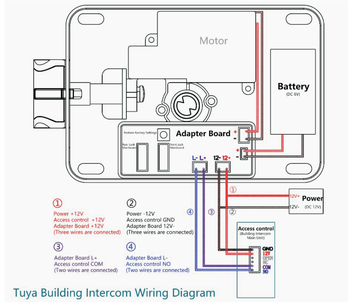

4